

Lexmark CX417



CX417de

Stunning colour. Stellar versatility.

The Lexmark CX417 colour laser desktop MFP does more than deliver PANTONE®colour matching and fast print, fax, copy and scan speeds—it offers optional solutions to help streamline your business.

Accurate colour that's brand-worthy.

The Lexmark CX417 MFP delivers rich, consistent colour printing that can enhance your company's materials and brand. It's faster and more reliable than ever.

Freedom to print on the fly: Produce professional colour in-house, on demand. With 512 MB of upgradable memory and a fast dual-core processor, you'll have speed as well as power and convenience.













Colour Up to 30 ppm

10.9 cm (4.3-inch) touch screen

Solutions

Professional colour matching: Lexmark
Named Colour Replacement and PANTONE®
calibration make it easy to develop a
consistent brand image by accurately
matching your colours.

High resolution graphics: With up to true 1200x1200 dpi resolution, images and graphics stay crisp. Lexmark's Unison™ Toner ensures consistent quality, too.

Super fast and quiet output: Quickly print, copy and scan up to 30 pages per minute in black and colour, plus produce a 1 page colour document in as little as 11.5 seconds.

More productivity. Less hassle.

Produce everything on the spot from in-store signage to customer presentations. Features like an easy-toread control panel, large output bin and more make printing a breeze.

Reliable performance: Easily print up to 6,000 pages a month, plus enjoy fewer maintenance hassles, thanks to state-of-the-art paper handling.

Run larger jobs without interruption: With an input capacity of up to 1,450 sheets and high yield toner cartridge options, you won't have to add paper or change cartridges as often. **Easy-to-read colour display with number pad:** Stay on top of your jobs with our convenient 10.9 cm (4.3-inch) colour touch screen and front direct USB port.

Innovative toner that optimizes
performance: Get greater system
performance with Lexmark's Unison™ Toner,
which delivers consistent image quality from
first print to last.

Productive workflows. Sustainable design.

Quickly respond to changing business needs with our eco-friendly printers that streamline your workflow.


Help workers do more: With standard Gigabit Ethernet networking, our system can print jobs from the network faster, so your team stays productive.

Enjoy enterprise-level security: Now you can authenticate, authorize and audit employee usage. Plus, protect sensitive data using standard network security protocols.

Save resources and the planet: An instant warm-up fuser, built-in 2-sided printing, plus Quiet, Hibernate and Eco modes minimize noise and save paper and energy.

Print anytime and anywhere*: With this system, you can print from desktops as well as mobile devices that can run applications.

 $[\]hbox{\rm * For more information on Lexmark Mobile Solutions see: lexmark.com/mobile}$

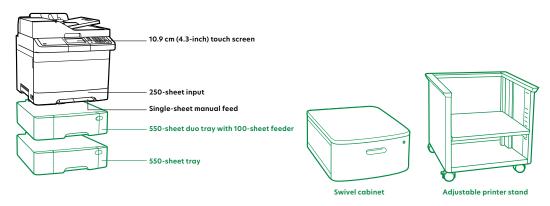



Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen int Speed. Up to ' Black: 30 ppm / Colours 15 peconds inter to First Page. As fast as Black: 4800 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 Colour Quality (2400 x 600 dph, 1200 x 1200 dpl / Colour. 18.00 dpl / Colour. 18.0	Product specifications	Lexmark CX417de
Inter Speed: Up to? Black: 30 ppm / Colour: 30 ppm Inter Speed: Up to? Black: 4800 Colour Quality (2400 x 600 dp), 1200 x 1200 x 1200 dp), 1200 x 120	Print	
Black: 10.5 seconds / Colour: 11.5 seconds mit Resolution Black: 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 000 dpi), 1200 x 1200 dpi / Colour. 4800 Colour	Display	Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen
Black: 4800 Colour Quality (2400 x 600 dpi), 1200 x 1200 dpi / Colour. 4800 Colour Quality (2400 x 600 dpi), 1200 x 1200 temory / Processor Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz ard Disk Not Available scommended Monthly Page Volume' 800 - 6000 pages Auximum Monthly Duty Cycle: Up to ¹ 800 - 6000 pages per month opy specific Up to ¹ 800 - 8000 pages per month opy Altitudes Score Specification Hi-Specification Hi-Specification Files Such Supported Robust Standard: 1918 MB / Maximum: 1450 - 1 pages 75 gam bond leader to period period for Maximum: 1450 - 1 pages 75 gam bond leader Sizes Supported Refer to the Cord Stock & Label Quide, Transparencies, Plain peges, Page Pages	Print Speed: Up to ³	Black: 30 ppm / Colour: 30 ppm
Nemory / Processor Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz And Disk Not Available Scommended Monthly Page Volume* 800 - 6000 pages And Disk Poly Cycle: Up to* 75000 pages per month And Disk Poly Cycle: Up to* 800 - 6000 pages per month And Disk Poly Cycle: Up to* 800 - 6000 pages per month And Disk Poly Cycle: Up to* 800 - 6000 pages per month And Disk Poly Cycle: Up to* 800 - 6000 pages per month Black: 30 cpm / Colour: 30 cpm Imme to First Copy: as fast as 80 - 8000 page per month Comparity Poly Colour: 11.6 seconds Conner Type / ADF Scon 80 - 8000 pages per minute / Colour: 13.1 4s sides per minute Aff. It Disples Scon Speed: Up to 80 - 80 - 80 - 80 - 80 - 80 - 80 - 80	Time to First Page: As fast as	Black: 10.5 seconds / Colour: 11.5 seconds
tard Disk Not Available ecomended Monthly Page Volume* 800 - 6000 pages footwind Monthly Duty Cycle: Up to* 75000 pages per month footy Typy Speed: Up to* 81 ack 30 cpm / Colour: 30 cpm inter to Fist Copy: as fast as 81 ack: 10.8 seconds / Colour: 11.6 seconds can can can Can Can Can Flatbed scanner with ADF / RADF (reversing Duplex) Al/Lit Duplex Scan Speed: Up to 81 ack: 30 / 32 sides per minute / Colour: 31 / 14 sides per minute Al/Lit Simplex Scan Speed: Up to 81 ack: 30 / 32 sides per minute / Colour: 31 / 14 sides per minute Al/Lit Simplex Scan Speed: Up to 81 ack: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute Al/Lit Simplex Scan Speed: Up to 81 ack: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute Cat Cat Cat Cat Cat Cat Cat C	Print Resolution	Black: 4800 Colour Quality (2400 x 600 dpi), 1200 x 1200 dpi / Colour: 4800 Colour Quality (2400 x 600 dpi), 1200 x 1200 dpi
ecommended Monthly Page Valume* Notify Duty Cycle: Up to* 75000 pages per month Oppy Oppy Oppy Oppy Oppy Oppy Oppy Op	Memory / Processor	Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz
Adminum Monthly Duty Cycle: Up to ' 75000 pages per month Topopy Top	Hard Disk	Not Available
opy Speed: Up to 1 Speed: Up to 2 Speed: Up to 3 Speed: Up to 3 Speed: Up to 4 Speed: Up to 5 Speed: Up to 4 Speed: Up to 6 Speed: Up to 7 Speed: Up	Recommended Monthly Page Volume ⁷	800 - 6000 pages
ime to First Copy: as fast as Black: 30 cpm / Colour: 30 cpm ime to First Copy: as fast as Black: 10.8 seconds / Colour: 11.6 seconds can conner Type / ADF Scon Flotbed scanner with ADF / RADF (reversing Duplex) A/Ltr Duplex Scan Speed: Up to Black: 13 / 14 sides per minute / Colour: 13 / 14 sides per minute A/Ltr Duplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute ax todem Speed ITU T.30, V.34 Holf-Duplex, 33.6 Kbps Upplies² papel Second Speed: Up to Black: 13 / 14 sides per minute / Colour: 30 / 32 sides per minute ax todem Speed ITU T.30, V.34 Holf-Duplex, 33.6 Kbps Upplies² papel Speed: Up to Speed: Up to Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges papel Speed: Up to A0,000 page, based on 3 overage letter/AA-size pages per print job and ~ 5% coverage ortridge(s) Shipping with Product' 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges apper Handling Single-Sheet Monual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Spot Paper Handling Single-Sheet Monual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Spot Paper Handling Single-Sheet Monual Feed, Integrated Duplex, 150-Sheet Tray appear Input Capacity; Up to Standard: 250-1 pages 75 gsm bond / Maximum: 1450-1 pages 75 gsm bond apper Output Capacity; Up to Standard: 250-1 pages 75 gsm bond / Maximum: 1450-1 pages 75 gsm bond Refer to the Card Stock & Label Guide, Transparencies, Plain Paper, Paper Labels, Card Stock Refer to the Card Stock & Label Guide, Transparencies, Plain Paper, Paper Labels, Card Stock Referred Information* Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Spee Certified (Type B) Print: 49 dBA / Copy; 50 dBA / Scan: 50 dBA Paper Duritor Guider Copy of the Copy of the Copy of Sod BA / Scan: 50 dBA Paper Duritor Copy of the Copy of the Specification For Copy of Sod B	Maximum Monthly Duty Cycle: Up to⁵	75000 pages per month
Elack: 10.8 seconds / Colour: 11.6 seconds Canner Yipe / ADF Scon Flatbed sconner with ADF / RADF (reversing Duplex) A/Ltr Duplex Scon Speed: Up to Black: 13 / 14 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Duplex Scon Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scon Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scon Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scon Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scon Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scon Speed: Up to Black: High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) Starter Return Program Toner Cartridges Artridges Shipping with Product: 1,400-page Black and Colour (CMYX) Starter Return Program Toner Cartridges Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Apper Handling Single-Sheet Manual Feed, Integrated Duplex, 1	Сору	
Conner Type / ADF Scan Flatbed scanner with ADF / RADF (reversing Duplex) A/Ltr Duplex Scan Speed: Up to Black: 13 / 14 sides per minute / Colour: 13 / 14 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute A/Ltr Simplex Scan Speed: Up to A/Ltr Simplex Speed: Colour (CMY) High Yield Cartridges, 3,000-poge Black Cartridge, 2,30 Average Colour (CMY) Cartridges Average C	Copy Speed: Up to ³	Black: 30 cpm / Colour: 30 cpm
Flatbed scanner With ADF / RADF (reversing Duplex) 4/Ltr Duplex Scan Speed: Up to Black: 13 / 14 sides per minute / Colour: 13 / 14 sides per minute 4/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute ax todem Speed ITUT.30, V.34 Half-Duplex, 33.6 Kbps upplies² asser Cartridge Yields (up to)¹ 6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges asser Cartridge Yields (up to)¹ 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage artridge(s) Shipping with Product¹ 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges artridge(s) Shipping with Product¹ 2,500-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input per Input Capacity: Up to 3 Standard: 150 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to 3 Standard: 150 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond Aledia Types Supported 8 Refer to the Card Stack & Lobel Guide, Transparencies, Plain Paper, Paper Labels, Card Stock Bedici Sizes Supported 5 Card Stock & Lobel Guide, Transparencies, Plain Paper, Paper Labels, Card Stock Bedici Sizes Supported 6 Pront USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified Port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) arouted Guarantee 1-Year Onsite Service, Next Business Day	Time to First Copy: as fast as	Black: 10.8 seconds / Colour: 11.6 seconds
A/Ltr Duplex Scan Speed: Up to Black: 13 / 14 sides per minute / Colour: 13 / 14 sides per minute / A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute / A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 30 / 30 / 30 / 3	Scan	
A/Ltr Simplex Scan Speed: Up to Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute ax Industry Speed ITU T.30, V.34 Half-Duplex, 33.6 Kbps upplies² asser Cartridge Yields (up to)¹ 6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges hotoconductor Estimated Yield: Up to¹ 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage artridge(s) Shipping with Product¹ 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges aper Handling single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input 550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray aper Input Capacity: Up to Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond lecid Types Supported Refer to the Card Stock & Label Guide, Transparencies, Plain Pager, Paper Labels, Card Stock lecid Sizes Supported Altitude: O - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (reversing Duplex)
todem Speed ITU T.30, V.34 Half-Duplex, 33.6 Kbps upplies² aser Cartridge Yields (up to)¹ 6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges hotoconductor Estimated Yield: Up to⁴ 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage artridge(s) Shipping with Product¹ 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges apper Handling soluded Paper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input spitional Paper Handling Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond apper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond seedia Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock seedia Sizes Supported Officio, Universal, Letter, Legal, JIS-BS, Folio, Executive, AS, A4 seedal Information* standard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) specified Operating Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	A4/Ltr Duplex Scan Speed: Up to	Black: 13 / 14 sides per minute / Colour: 13 / 14 sides per minute
ITU T.30, V.34 Half-Duplex, 33.6 Kbps upplies² aser Cartridge Yields (up to)' 6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges hotoconductor Estimated Yield: Up to4 40,000 pages, based on 3 average letter/A4-size pages per print job and ~5% coverage artridge(s) Shipping with Product' 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges aper Handling single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input potional Paper Handling 550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray aper Input Capacity: Up to Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond Aledia Types Supported Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond Aledia Types Supported Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 160 pages 75 gsm bond Aledia Types Supported Capacity: Up to Standard: 150 pages 75 gsm bond / Maxi	A4/Ltr Simplex Scan Speed: Up to	Black: 30 / 32 sides per minute / Colour: 30 / 32 sides per minute
aper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Standard 250-Lip pages 75 gsm bond / Maximum: 1450-Lip pages 75 gsm bond Ager Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Aledia Sizes Supported Front USB 2.0 Specification Hi-Speed Certified port (Type B) Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Front USG Guarantee 6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300 page Colour (CMY) High Yield Cartridges Pages Pages Pages Pages per print job and ~ 5% coverage attridge(s) Shipping with Product Index of Success Pages	Fax	
6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,30 page Colour (CMY) Cartridges hotoconductor Estimated Yield: Up to ⁴ 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage artridge(s) Shipping with Product ¹ 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges **Apper Handling** **Coluded Paper Handling** **Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Sprint Paper Handling** **Single-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray **Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond apper Output Capacity: Up to Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond apper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Aledia Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Aledia Sizes Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Steneral Information** **Standard Connectivity** **Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) **Specified Operating Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Paper Gertified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee	Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps
Adv. Adv. Adv. Adv. Adv. Adv. Adv. Adv.	Supplies ²	
Intridge(s) Shipping with Product* 1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges Integrated Paper Handling Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Stondard: 250-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray aper Input Capacity: Up to Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Aledia Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Aledia Sizes Supported Officio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Seneral Informations Attandard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified Port (Type B) Applianal Network Ports MarkNet N8352 802:11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Laser Cartridge Yields (up to) ¹	6,000-page Black High Yield Cartridge, 3,500-page Colour (CMY) High Yield Cartridges, 3,000-page Black Cartridge, 2,300-page Colour (CMY) Cartridges
Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Stouded Paper Handling Single-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Input Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Media Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Media Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Seneral Informations Standard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Supported Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Torduct Guarantee Nark Business Day	Photoconductor Estimated Yield: Up to ⁴	40,000 pages, based on 3 $$ average letter/A4-size pages per print job and \sim 5% coverage
Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input Stocked Paper Handling Stocked Duo Tray with 100-Sheet Feeder, 550-Sheet Tray Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Media Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Media Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Seneral Information Standard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Septional Network Ports MarkNet N8352 802.11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Front USB 2-0 Specification Bi-Speed Certified Service, Next Business Day	Cartridge(s) Shipping with Product ¹	1,400-page Black and Colour (CMYK) Starter Return Program Toner Cartridges
Apptional Paper Handling 550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray aper Input Capacity: Up to Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond Aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Acidia Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Acidia Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Acidia Financial Information Acidia Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Specified Operating Apptional Network Ports MarkNet N8352 802.11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Acoduct Guarantee 1-Year Onsite Service, Next Business Day	Paper Handling	
Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond aper Output Capacity: Up to Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Media Types Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Media Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Seneral Informations Standard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Applianal Network Ports MarkNet N8352 802.11b/g/n Wireless Descriptional Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Troduct Guarantee 1-Year Onsite Service, Next Business Day	Included Paper Handling	Single-Sheet Manual Feed, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input
Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Redia Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Seneral Information tandard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Appliance Certified (Type B) MarkNet N8352 802.11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) reduct Guarantee 1-Year Onsite Service, Next Business Day	Optional Paper Handling	550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray
Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Redia Sizes Supported Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Reineral Information Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Reineral Information Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Reineral Information Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Reineral Information Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Redia Sizes Supported Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Refer to the Card Stock & Label Guide., A5, A4 Re	Paper Input Capacity: Up to	Standard: 250+1 pages 75 gsm bond / Maximum: 1450+1 pages 75 gsm bond
Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4 ideneral Information tandard Connectivity Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Optional Network Ports MarkNet N8352 802.11b/g/n Wireless Point: 49 dBA / Copy: 50 dBA / Scan: 50 dBA pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Paper Output Capacity: Up to	Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond
Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Optional Network Ports MarkNet N8352 802.11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Media Types Supported	Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Paper Labels, Card Stock
Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B) Applional Network Ports MarkNet N8352 802.11b/g/n Wireless Point: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) Product Guarantee 1-Year Onsite Service, Next Business Day	Media Sizes Supported	Oficio, Universal, Letter, Legal, JIS-B5, Folio, Executive, A5, A4
Certified (Type B) Applional Network Ports MarkNet N8352 802.11b/g/n Wireless Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) And the description of t	General Information ⁶	
Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Standard Connectivity	Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B)
pecified Operating Environment Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) roduct Guarantee 1-Year Onsite Service, Next Business Day	Optional Network Ports	MarkNet N8352 802.11b/g/n Wireless
roduct Guarantee 1-Year Onsite Service, Next Business Day	Noise Level: Operating	Print: 49 dBA / Copy: 50 dBA / Scan: 50 dBA
	Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F)
470 y 444 y 50 / Weight	Product Guarantee	1-Year Onsite Service, Next Business Day
Ze (IIIII - T X VV X D) / VVeignt 4/0 X 444 X 558 mm / Z/.39 kg	Size (mm - H x W x D) / Weight	470 x 444 x 558 mm / 27.39 kg

Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.





www.lexmark.com



© 2017 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.